


## LITHIUM-ION LED FLASHLIGHT INSTRUCTION MANUAL

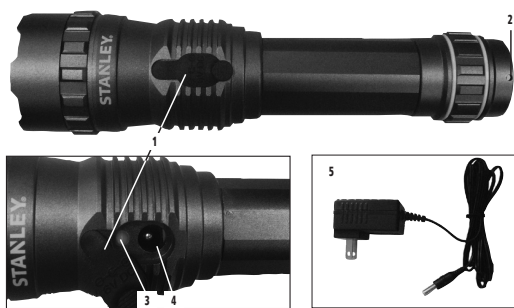

1. Rubber protective cover
2. Power/light mode button
3. Charge status LED indicator
4. DC charging port
5. AC charging adapter

### SAVE THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE.

© 2014 Baccus Global LLC  
Boca Raton, FL 33432  
(877) 571-2391



This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not approved by the party responsible for compliance could void user's authority to operate the equipment.

## SAFETY GUIDELINES / DEFINITIONS

**DANGER:** Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.

**WARNING:** Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

**CAUTION:** Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

**CAUTION:** Used without the safety alert symbol indicates potentially hazardous situation which, if not avoided, may result in property damage.

**RISK OF UNSAFE OPERATION.** When using tools or equipment, basic safety precautions should always be followed to reduce the risk of personal injury. Improper operation, maintenance or modification of tools or equipment could result in serious injury and property damage. There are certain applications for which tools and equipment are designed. Manufacturer strongly recommends that this product NOT be modified and/or used for any application other than for which it was designed. Read and understand all warnings and operating instructions before using any tool or equipment.

## IMPORTANT SAFETY INSTRUCTIONS READ ALL INSTRUCTIONS

**WARNING: Read all instructions before operating flashlight. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.**

### GENERAL SAFETY WARNINGS AND INSTRUCTIONS

**WARNING:** This product or its power cord contains lead, a chemical known to the State of California to cause cancer and birth defect or other reproductive harm. Wash hands after handling.

### INSTRUCTIONS PERTAINING TO RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS

**WARNING – WHEN USING ELECTRICAL APPLIANCES, BASIC PRECAUTIONS SHOULD ALWAYS BE FOLLOWED, INCLUDING THE FOLLOWING:**

- To reduce the risk of injury, close supervision is necessary when the flashlight is used near children.
- Use only attachments recommended or sold by the manufacturer.

**WARNING: TO REDUCE THE RISK OF ELECTRIC SHOCK:**

- Charge indoors only.
- Do not expose charging adapters or battery to moisture, water or any other liquid.
- Use only the charging adapter supplied by the manufacturer to recharge.
- When an extension cord is used:
  - The marked rating of the detachable power supply cord or extension cord should be at least as great as the electrical rating of this appliance.
  - The cord should be arranged so that it will not drape over the countertop or tabletop where it can be tripped over, snagged, or pulled on unintentionally (especially by children).
  - The extension cord should be kept dry and off the ground.

**WARNING: FIRE HAZARD:** Keep flashlight lamp away from materials that may burn.

**CAUTION: TO REDUCE THE RISK OF INJURY OR PROPERTY DAMAGE:**

- The LED gets hot quickly. Do not touch hot lens, guard or enclosure.
- Never place the light face down on any surface when lit, charging or not in use. Never store the light face down on any surface.
- Never look directly into the light or shine the light into another person's eyes.
- Keep sharp objects away from lens — it can crack or break.
- Do not expose this unit to extremely high temperatures.
- Do not drop or throw the flashlight. It contains a lithium-ion battery.
- Use only with AC charging adapter provided with the unit. Plug in the charging adapter at the flashlight first, then plug into the charging source.
- After charging/recharging, disconnect charging adapter and wait 5 minutes before use.
- Do not crush, cut, pull or expose the charging cable to extreme heat.
- Position the charging cable so it does not become entangled or become a safety hazard. Keep the charging cable away from sharp edges.
- Do not open the flashlight body casing. There are no user-serviceable parts inside.
- Do not operate the flashlight without the lens in place.
- To reduce risk of damage to the charging cable, pull by the plug rather than the cord when disconnecting.
- Do not attempt to charge the unit if the charging adapter is damaged – return the charging adapter to manufacturer for repair or replacement.

### SPECIFIC SAFETY INSTRUCTIONS FOR LITHIUM-ION BATTERIES

**WARNING: TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, BURST HAZARD, OR INJURY TO PERSONS OR PROPERTY:**

- Lithium-ion batteries are small, compact and ideal for providing long-lasting power to this unit. However, they must be used and charged properly. Improper use can result in serious injury, fire, or death.
- Lithium-ion batteries can explode in the presence of a source of ignition. Do not use the product in the presence of an open flame.
- Do not place this lithium-ion battery powered unit in fire or apply heat to it.
- Do not subject this lithium-ion battery powered unit to strong impacts or shocks. The battery in this unit contains safety and protection devices which, if damaged, may cause the battery to generate heat, rupture or ignite.
- Do not expose the lithium-ion battery to water or salt water, or allow the battery to get wet.
- Avoid storing this lithium-ion battery powered unit in the basement, bathroom or other areas of the house that are or may become wet or where humidity and moisture may concentrate.
- Do not leave this lithium-ion battery powered unit in direct sunlight, or use or store the unit inside cars in hot weather. Doing so may cause the battery to

generate heat, rupture, or ignite. Using the battery in this manner may also result in a loss of performance and a shortened life expectancy.

- Never charge this unit near heat or flammable objects.
- **NEVER THROW WATER ON A BURNING LI-ION BATTERY! If a lithium-ion battery does catch on fire, it will burn even more violently if it comes in contact with water or even moisture in the air. A fire extinguisher must be used.**

### Battery Charging and Capacity

This unit is delivered in a partially charged state – you must fully charge it before using it for the first time.

When stored at room temperature with a full charge, Li-ion batteries will begin to discharge from the time they are manufactured, even when unused. Deep discharges also decrease their capacity. Battery life can be extended by the following:

- Charge battery to full capacity before storage.
- Optimal storage temperatures for this unit are between 5°C and 20°C (41°F and 68°F).
- Never discharge the battery fully.
- Charge after each use.
- Always charge at least once every 3-6 months if not in frequent use to prevent overdischarge.

### Transportation of Lithium-Ion Batteries

- Always check all applicable local, national, and international regulations before transporting a unit containing a Lithium-Ion battery.
- Transporting an end-of-life, damaged, or recalled battery may, in certain cases, be specifically limited or prohibited.

### INSTRUCTIONS PERTAINING TO WATERPROOF FLASHLIGHTS

The rubber protective cover acts to preserve the waterproof qualities of the flashlight. The protective cover contacts the charging port cover to prevent water from entering the gap. An undamaged rubber protective cover and lens, and proper sealing of the rubber protective cover before use are very important.

**CAUTION: TO REDUCE THE RISK OF PROPERTY DAMAGE:**

- Any of the following may cause the unit to no longer be waterproof:
  - Attempting to remove the rubber protective cover, or pulling it roughly or handling it in any way that causes it to lose shape;
  - Use of the unit with a damaged protective cover or lens;
  - Improper sealing of the waterproof rubber protective cover; and/or
  - Submerging this unit in water deeper than 1 meter, for time longer than 30 minutes and/or in temperatures other than between 41°F and 104°F (5°C and 40°C).

Do not use the unit if these conditions exist or it could sustain permanent damage.

## SAVE THESE INSTRUCTIONS

### INTRODUCTION

Congratulations on purchasing your new **Stanley Lithium-Ion Flashlight**. Read this **Instruction Manual** and follow the instructions carefully before using your new flashlight.

### CHARGING/RECHARGING THE FLASHLIGHT

This unit is shipped in a partially charged state. Charge unit after purchase and BEFORE first use using the 120 volt AC charging adapter for approximately 6 hours or until the charge status LED indicator lights blue.

Recharge after each use until the charge status LED indicator lights blue.

**IMPORTANT: When the unit is not in use, we recommend that the battery is charged at least every 3 to 6 months.**

**CAUTION: TO REDUCE THE RISK OF INJURY OR PROPERTY DAMAGE:**

- Never place the light face down on any surface when charging.
- Make sure the flashlight is turned OFF during recharging, as operating the flashlight can slow the recharging process.
- Failure to keep the battery charged will cause permanent damage and result in poor performance.

### Charging/recharging

1. Make sure the flashlight is turned off.
2. Lift up the flashlight's rubber protective cover.
3. Insert the barrel connector of the AC charging adapter into the DC charging port on the flashlight.
4. Plug the 120 volt AC charging adapter into a (powered) standard North American 120 volt 60Hz outlet. The charge status LED indicator will light red to indicate the unit is charging.
5. Charge until the charge status LED indicator lights blue.
6. When charging is complete, first unplug the AC charging adapter from the power source, then disconnect the barrel connector of the AC charging adapter from the flashlight. Store the adapter in a safe place.
7. Put back the flashlight's rubber protective cover in place to cover the DC charging port. Make sure it fits securely as it acts to preserve the waterproof qualities of the flashlight.

### OPERATING INSTRUCTIONS

The power/light mode button is located at the bottom of the flashlight. It turns the flashlight on and off; and is also used to select high (bright), low (dimmer) and flashing (SOS) modes.

**Note:** The charge status LED indicator will not light during cordless operation of the flashlight.

### Operating the flashlight cordless

#### FOR HIGH (BRIGHT) MODE:

1. Disconnect the charging adapter.
2. Press the power/light mode button firmly (a "click" will sound). The flashlight is now operating at its highest (brightest) setting.
3. Press the power/light mode button firmly again (a "click" will sound) to turn the flashlight off.

#### FOR LOW (DIMMER) MODE:

1. Disconnect the charging adapter.
2. Press the power/light mode button firmly (a "click" will sound).
3. Press the power/light mode button **gently once (no "click" will sound)**. The flashlight is now operating at its lowest (dimmer) setting. Gently press it twice more to return to high (bright) mode.
4. Press the power/light mode button firmly again (a "click" will sound) to turn the flashlight off.

#### FOR FLASHING (SOS) MODE:

1. Disconnect the charging adapter.
2. Press the power/light mode button firmly (a "click" will sound).
3. Press the power/light mode button **gently twice (no "click" will sound)**. In this mode, the light will repeatedly emit the SOS signal (a continuous sequence of three short flashes/three longer flashes/three short flashes). Gently press it once again to return to high (bright) mode.
4. Press the power/light mode button firmly again (a "click" will sound) to turn the flashlight off.

**IMPORTANT:** If the flashlight battery voltage is low, it may operate in low (dimmer) mode even when the power/light mode button is pressed only once. The built-in low voltage protection will activate after a short period of operation, then the unit will automatically shut down. This is a special feature to protect the unit's internal battery from damage. Recharge the battery before continuing use.

### Operating the flashlight corded

**Manufacturer recommends only operating the unit in corded mode for a short period of time. See the Important Note that follows.**

Attach the appropriate adapter as described in the "Charging/Recharging" section. Operate the flashlight normally as outlined in the previous section.

**IMPORTANT NOTE:** The flashlight will operate while the charging adapter is attached, but will continue to draw power from the unit's lithium-ion battery while the flashlight operates. This may cause the low voltage protection to activate and shut the flashlight down. To avoid the flashlight suddenly shutting down, only operate the unit in corded mode for a short period of time.

### CARE AND MAINTENANCE

All batteries lose energy from self-discharge over time and more rapidly at higher temperatures. When the unit is not in use, we recommend that the battery is charged at least every 3 to 6 months.

If the unit gets dirty, gently clean the outer surfaces of the flashlight unit with a soft cloth moistened with a mild solution of water and detergent.

There are no user-replaceable parts. Periodically inspect the condition of adapter. Contact manufacturer to replace any components that have become worn or broken.

### Battery replacement/disposal

#### BATTERY REPLACEMENT

The battery should last the service life of the unit. Service life is dependent on a number of factors including but not limited to the number of recharge cycles, and proper care and maintenance of the battery by the end user. Contact manufacturer for any information you may need.

### SAFE BATTERY DISPOSAL

Contains a lithium-ion battery, which must be disposed of properly. Recycling is required. Failure to comply with local, state and federal regulations can result in fines, or imprisonment.

Please recycle.

### WARNINGS:

- Do not dispose of the battery in fire as this may result in an explosion.
- Before disposing of the battery, protect exposed terminals with heavy-duty electrical tape to prevent shorting (shorting can result in injury or fire).
- Do not expose battery to fire or intense heat as it may explode.

### TROUBLESHOOTING

#### The flashlight will not charge

- Check the connection to the AC power source. Make sure there is good contact.
- Confirm that there is functioning AC current.

#### The flashlight will not operate cordless

- Make sure the power/light mode button has been pressed firmly (and that you hear a distinct "click") to turn the flashlight on.
- The internal battery may be completely discharged. Charge the unit following the directions given in this manual.

If the unit does not operate after taking the steps given above, contact the manufacturer at (877) 571-2391.

### ACCESSORIES

Recommended accessories for use with this unit may be available from the manufacturer. If you need assistance regarding accessories, please contact manufacturer at 1-877-571-2391.

**WARNING:** The use of any accessory not recommended for use with this appliance could be hazardous.

### SERVICE INFORMATION

Whether you need technical advice, repair, or genuine factory replacement parts, contact the manufacturer at 877-571-2391.

### ONE-YEAR LIMITED WARRANTY

The manufacturer warrants this product against defects in materials and workmanship for a period of ONE (1) YEAR from the date of retail purchase by the original end-user purchaser ("Warranty Period").

If there is a defect and a valid claim is received within the Warranty Period, the defective product can be replaced or repaired in the following ways: (1) Return the product to the manufacturer for repair or replacement at manufacturer's option. Proof of purchase may be required by manufacturer. (2) Return the product to the retailer where product was purchased for an exchange (provided that the store is a participating retailer). Returns to retailer should be made within the time period of the retailer's return policy for exchanges only (usually 30 to 90 days after the sale). Proof of purchase may be required. Please check with the retailer for their specific return policy regarding returns that are beyond the time set for exchanges.

This warranty does not apply to accessories, bulbs, fuses and batteries; defects resulting from normal wear and tear, accidents; damages sustained during shipping; alterations; unauthorized use or repair; neglect, misuse, abuse; and failure to follow instructions for care and maintenance for the product.

This warranty gives you, the original retail purchaser, specific legal rights and you may have other rights which vary from state to state or province to province. This product is not intended for commercial use.

Please complete the Product Registration Card and return within 30 days from purchase of the product to: Baccus Global LLC, One City Centre, 1 North Federal Highway, Suite 200, Boca Raton, FL 33432. **Baccus Global LLC, toll-free number: (877) 571-2391.**

### SPECIFICATIONS

#### Flashlight (Conforms to UL STD. 73)

Bulb:	3 watt LED bulb
Battery:	Lithium-Ion, 3.6 V DC
Input:	6V DC, 1A
<b>AC Charging Adapter (Conforms to UL STD. 1310)</b>	
Input:	120V AC, 60Hz, 9W
Output:	6V DC, 1A

Imported by Baccus Global LLC,  
One City Centre, 1 North Federal Highway, Suite 200, Boca Raton, FL 33432  
www.baccusglobal.com 1-877-571-2391  
RD080515

